




CI 370 PRO

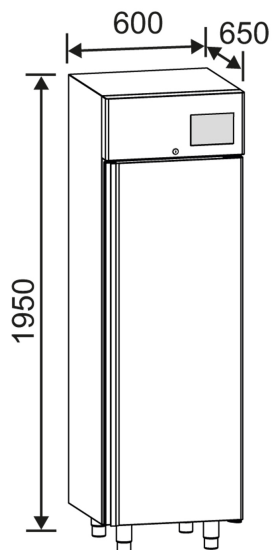

Color: **White**

Panel: **ADVANCED**

- Touch control panel with 7" display and password
- Data download to USB
- Backup battery for managing alarms in case of power failure
- Audible and visual alarms
- Wi-Fi connection (available starting from July 2024)

TECHNICAL FEATURES

Refrigeration Type	Forced air
Defrost Type	Automatic, with heating resistance
Condensate Evaporation	Automatic
Refrigerant Gas	R290
Climatic Class	+16°C / +38°C (ST)
Gross Capacity (liters)	400
Net Capacity (liters)	370
External Dimensions (W x D x H mm)	600 x 650 x 1950
Packaging Dimensions (W x D x H mm)	660 x 810 x 2120



CI 370 PRO

ELECTRICAL DATA

Power Supply (V/ph/Hz) 220-230/1/50

Power Plug Type F

STRUCTURAL FEATURES

Structure Upright

External Material Anti-bacterial coated steel white colour

Internal Material Stainless steel 18/10 AISI 304

Insulation Thickness (mm) 50

Insulated Door Yes

Door Reversibility Yes

Automatic Door Closure Yes

Shelves Number 3

Shelf Material Wire steel with white colour plastic coating

Shelves Dimensions (W x D mm) 460 x 470

Shelf Adjustment Step 11

Shelf Adjustment Step Range (mm) 100

Maximum Shelf Quantity 11

Drawers with extractable slides Optional

Drawer Adjustment Step 11

Drawer Adjustment Step Range (mm) 100

Maximum Drawer Quantity 11

CONTROL PANEL

Display Type Touch 7"

Languages ITA - ENG - FRA

Access Password Yes



CI 370 PRO

CONTROL PANEL

3-Level Access Password	Yes
Temperature Graph	Visible on display
Probe Type	Nr. 3 PT1000
Alarm Signaling	Acoustic and visual
Alarm Indications	Text form / codes
Adjustable High/Low Temperature Alarm	Yes
Adjustable Door Open Alarm	Yes
Power Loss Alarm	Yes
Probe Fault Alarm	Yes
Low Battery Alarm	Yes
Dirty Condenser Alarm	Yes
Evaporator Freezing Alarm	Yes
Acoustic Alarm Silencing Options	Yes
Acoustic Alarm Reactivation	Yes
Alarm Functionality Test	Yes
Calibration	Yes
Alarm Memory	Yes
Door Openings Memory	Yes
Defrost Memory	Yes
Event Memory	Yes
Daily Min/Max Temperature Memory	Yes
Data Logger Function with USB Port	Yes
USB Port	Type B
Data and Event Storage	Yes (on internal memory)
Dry Contact	Yes
Wi-Fi Connectivity	No
Monitoring App	Yes
Backup Battery for Display and Alarms	Yes



CI 370 PRO

CONTROL PANEL

Backup Battery Autonomy for Display and Alarms (hours)	48
--	----

ACCESSORIES

Open wire shelf

Chromium plated open wire basket

Stainless steel drawer

Plastic drawer divider

Drawer Perspex front shield

Castors Ø 80 mm, 2 with brakes

Door key locking

Electronic door lock (available for ADVANCED control panel only)

Temperature chart recorder

Internal electrical socket

Porthole with cover Ø 18 mm

Porthole with cover Ø 45 mm

UVA LED stripe for air sterilization

Glass door

Refrigerant R452a

GSM/GPRS telephone dialer

Voltage 230V/1ph/60Hz

Plug type A

Plug type B

Plug type G

Plug type I

Wooden crate packing

IQ Documentation

OQ Documentation



CI 370 PRO

ACCESSORIES

PQ Documentation



ESSE3 srl, Via Garibaldi 30
14022 Castelnuovo D.B. (AT)
Tel +39 011 99 27 706
Fax +39 011 99 27 506
e-mail: danielec@esse3-medical.com
web: www.esse3-medical.com

